



SELF-SERVICE WASHING SYSTEMS FOR 2-4 WASHING BAYS, CABINET
VERSION, OUTDOOR, OIL-, GAS-, WITH DISTRICT OR ELECTRICALLY HEATING

CarWash PLUS



Standard equipment CarWash PLUS


The CarWash PLUS systems are equipped with four standard cleaning and care programmes as standard. The CarWash PLUS appliance series are available up to system variant 10. CarWash PLUS can be equipped with all EHRLE payment systems as well as with CentralPay technology. The entire washing technology is housed in a stainless steel frame with powder-coated appliance panelling. CarWash PLUS units can be heated either with oil, gas, district heating or electricity. Just like the JetWash, CarWash PLUS includes a water softener (ion exchanger), which is designed as a dual softener to provide permanently soft water during the regeneration phases. The CarWash PLUS appliance series also has a reverse osmosis system with an 800-litre osmosis water tank. Reverse osmosis not only prevents water stains after washing and drying, but also ensures consistently high-quality washing results. Thanks to a special, integrated frost protection system, you can wash without any problems even at sub-zero temperatures.

Further equipment

The CarWash PLUS is controlled by a modern SIEMENS computer. The 7-inch TFT touchscreen monitor installed in the control system gives the investor access to all information about the key parameters of the self-service car wash system and provides detailed financial information about revenue and turnover.



CarWash PLUS 2-4 wash bays

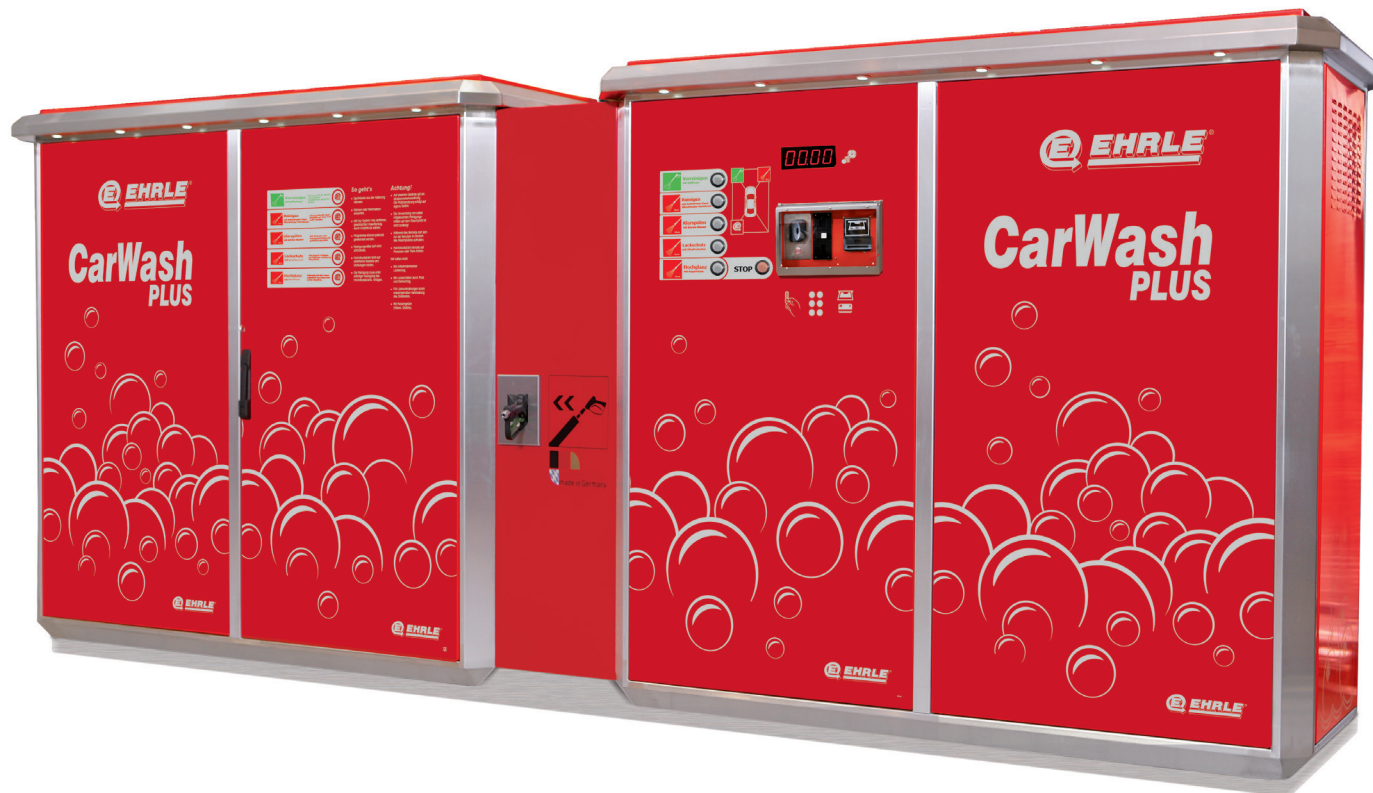



SELF-SERVICE WASHING SYSTEMS FOR 2-4 WASHING BAYS, CABINET
VERSION, OUTDOOR, OIL-, GAS-, WITH DISTRICT OR ELECTRICALLY HEATING

CarWash PLUS



Type	2-4 wash bays oil			2-4 wash bays gas			2-4 wash bays district heating			2-4 wash bays electrical		
Wash bays	2 WP	3 WP	4 WP	2 WP	3 WP	4 WP	2 WP	3 WP	4 WP	2 WP	3 WP	4 WP
Voltage	3/PE/AC/50Hz/400V			3/PE/AC/50Hz/400V			3/PE/AC/50Hz/400V			3/PE/AC/50Hz/400V		
Operating pressure per wash bay	120bar/12Mpa			120bar/12Mpa			120bar/12Mpa			120bar/12Mpa		
Max. pressure per wash bay	140bar/14Mpa			140bar/14Mpa			140bar/14Mpa			140bar/14Mpa		
Discharge capacity per wash bay	660l/h			660l/h			660l/h			660l/h		
Nozzle size	60056			60056			60056			60056		
Hot water capacity	60°C			60°C			60°C			60°C		
Heat output	50kW	55kW	55kW	55kW	74kW	85kW	55kW	74kW	85kW	24kW	36kW	42kW
Pump speed	900U/min			900U/min			900U/min			900U/min		
Water softening capacity	2x120m ³			2x120m ³			2x120m ³			2x120m ³		
Permeate output reverse osmosis	7.200l/da at 12°C water temp.			7.200l/da at 12°C water temp.			7.200l/da at 12°C water temp.			7.200l/da at 12°C water temp.		
Contents of osmosis tank	800l			800l			800l			800l		
Contents MicroPowder dispenser tank	35l			35l			35l			35l		
Contents UltraProtection tank	10l			10l			10l			10l		
Contents SuperFinish tank	10l			10l			10l			10l		
Connected load	9kW	11kW	14kW	8kW	10,4kW	13kW	9kW	11kW	14kW	32kW	46,4kW	54,6kW
Electrical protection	3x16A	3x20A	3x32A	3x16A	3x20A	3x32A	3x16A	3x20A	3x32A	3x63A	3x80A	3x100A
Weight net	1610kg	1640kg	1670kg	1610kg	1640kg	1670kg	1610kg	1640kg	1670kg	1610kg	1640kg	1670kg
Dimensions device (LxWxH)	4770x970x2100mm			4770x970x2100mm			4770x970x2100mm			4770x970x2100mm		



CarWash

CarWash

CarWash

EHRLE

CarWash

CarWash

EHRLE

CarWash

CarWash

EHRLE

CarWash

EHRLE

CarWash

CarWash

